



For special installation are supplied as standard 2 head cap screws M3x10 (M3x0.39 inch) that can be cut to size by the user.

Check that the screws do not interfere with the gears of the winch.


Always use the mounting head cap screws M3x6 (M3x0.23 inch) with washer and check that they do not interfere with the gears of the winch.

Screw type	Deck thickness
Head cap screw M3x6 with washer	from 0,2 to 2,3 mm


from 0.007 to 0.09 inch

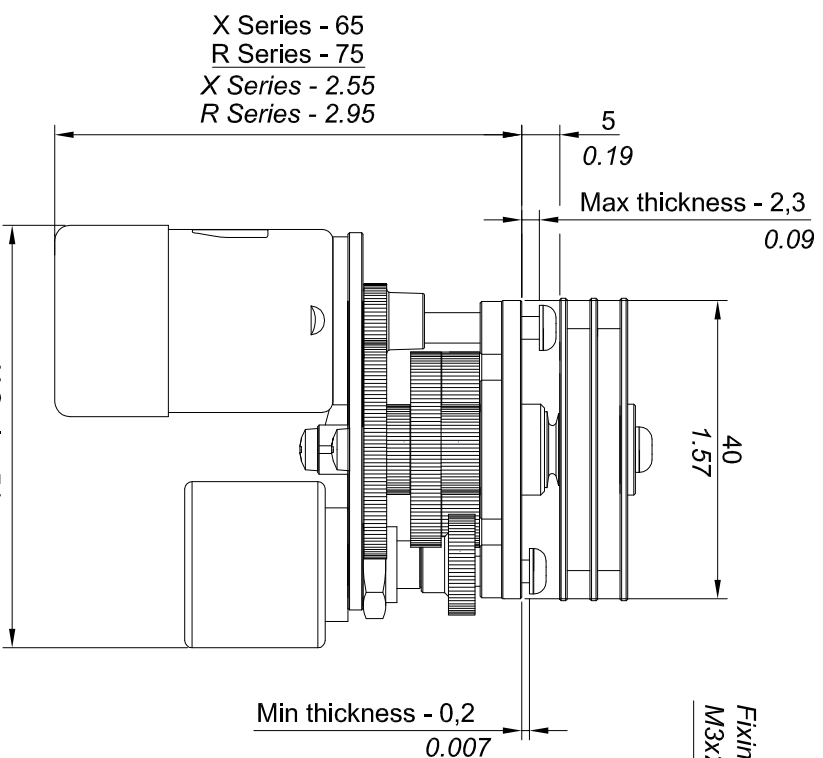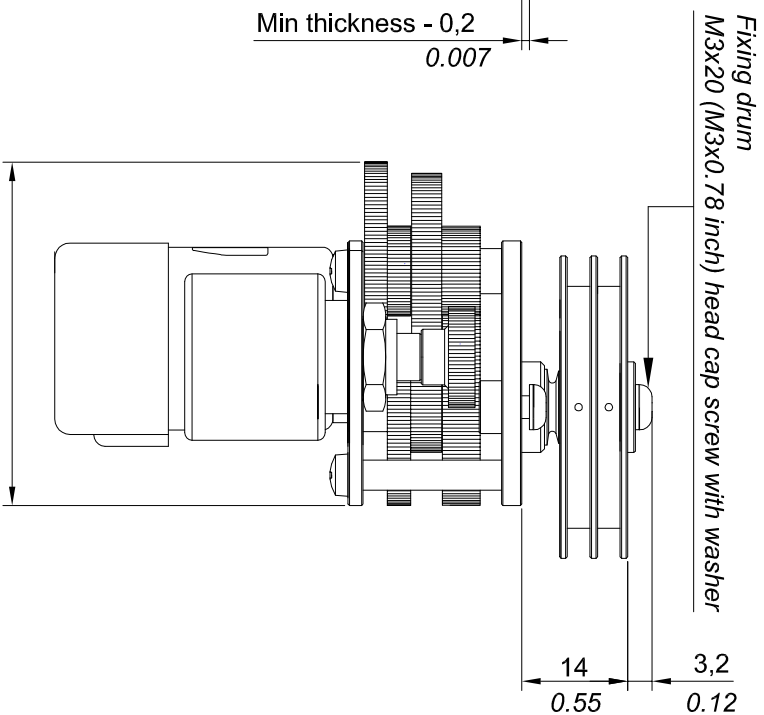
$$\frac{\text{Min thickness} - 0,2}{0,007}$$


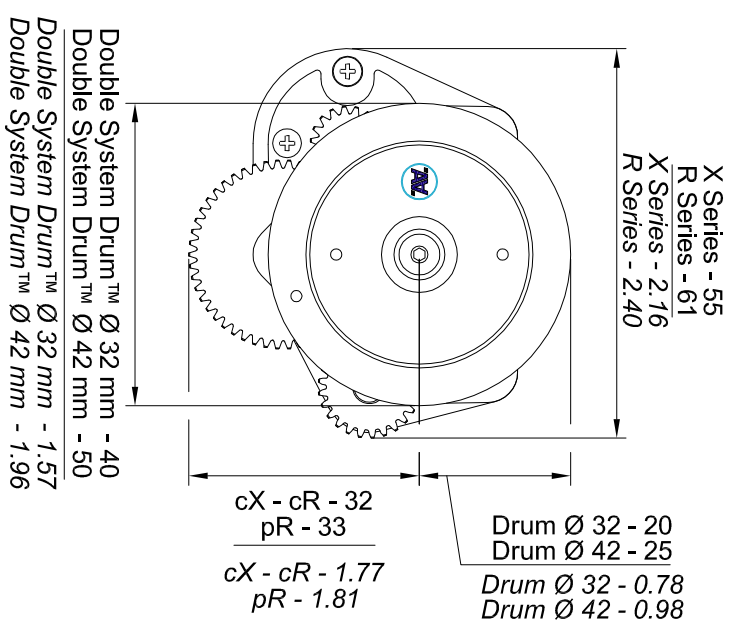
*Fixing drum
M3x20 (M3x0.78 inch) head cap screw with washer*



FRONT VIEW



SIDE VIEW




X Series - 55
R Series - 61
<hr/>
X Series - 2.16
R Series - 2.40

$$\begin{array}{r} cX - cR - 32 \\ pR - 33 \\ \hline cX - cR - 1.77 \\ pR - 1.81 \end{array}$$

Drum Ø 32 - 20
Drum Ø 42 - 25

Drum Ø 32 - 0.78
Drum Ø 42 - 0.98

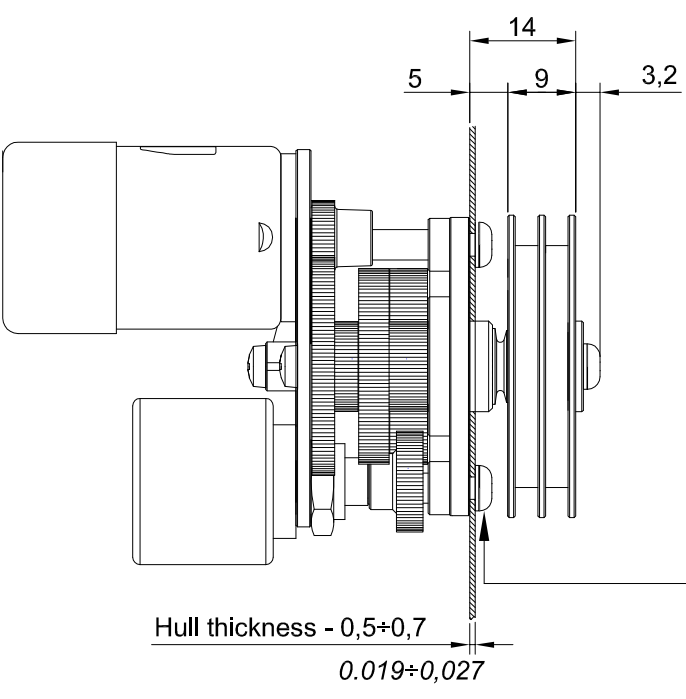

Hull thickness - 0,5÷0,7

 $0.019 \div 0,027$

HULL MOUNTING

data shown are not binding and may change without notice

Easy Winch